

# **Vermantia Firmware Upgrade Installation Procedure A4K STB**

Version 1.0

**Operations Department**

© Vermantia, 2018 All rights reserved.

*All copyright, intellectual and industrial rights in this document and in the technical knowledge it contains are owned by Vermantia and/or their respective owners.*

*This document is made available to the end users only for their internal use.*

*No part of this document nor any data herein may be published, disclosed, copied, reproduced, redistributed by any form or means, electronically or mechanically, or used for any other purpose whatsoever without the prior written approval of Vermantia.*

*All trademarks and copyrights mentioned herein are the property of Vermantia and/or their respective owners.*



*Any rights not expressly granted herein are reserved.*

Revision History					
Version	Status	Effective Date	Author(s)	Description of Change	Approved by
1.035	Final		Mastoropoulos Thanos	Initial Version	Fotopoulos Georgios

## Open A4K first time installation.

(Ignore that if doesn't appear )

Press >> to all 5 steps as the images below and next follow that instructions to the next page.

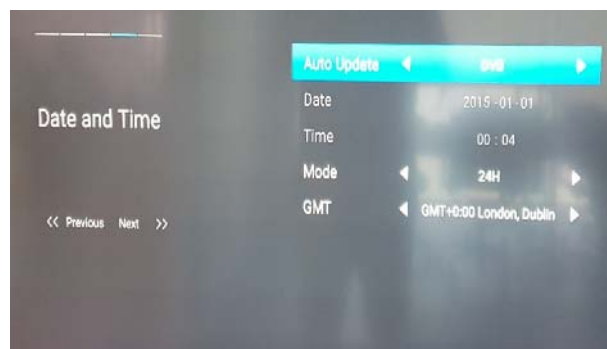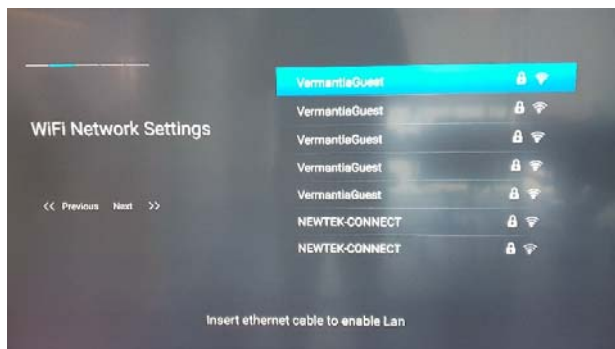

# Instructions

**Notice:** Connect HDMI, power supply and RF cables.

**Step 1.** You will copy the desired software we have provide you (.ZIP) into the USB (NTFS FORMAT).  
Connect the USB into the Set-top Box (STB).


**Step 2.** Power on STB and press **home** button (image 1).




**Step 3.** Navigate to **Settings**




**Step 4.** Press the **arrows (>>)** on the controller to change tab and go to **System**

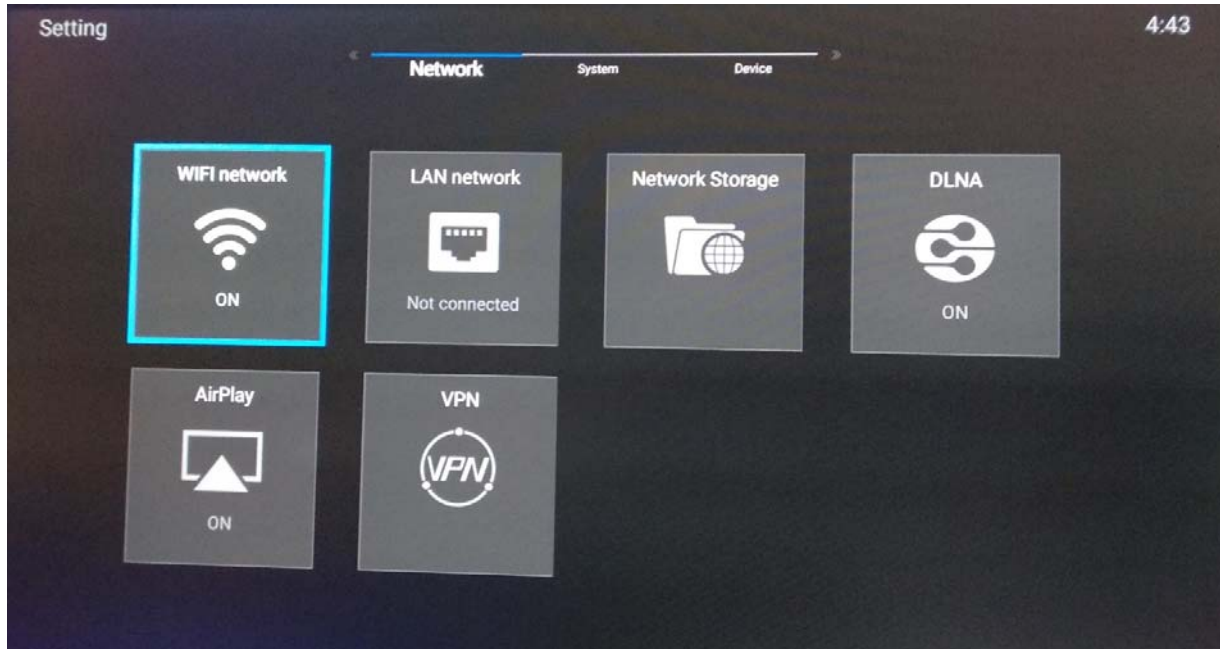



**Step 5.** Then navigate to **Upgrade**

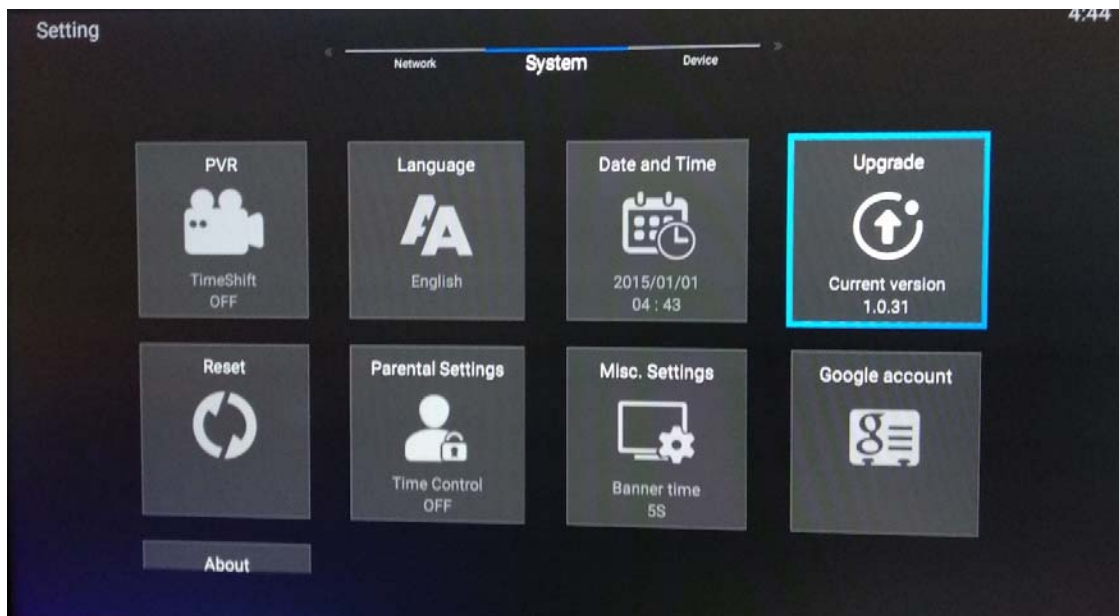

**Step 6.** Then press the **green** button (local update) on the remote control as below.

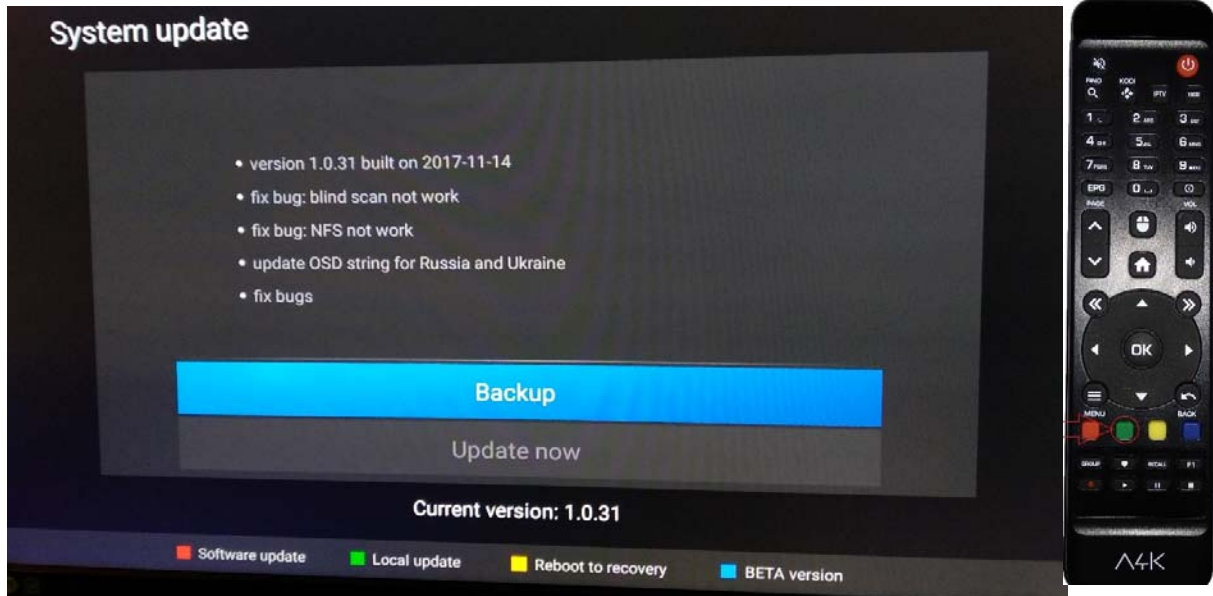

**Step 7.** Select C: folder and click **OK**. Next select **1.0.\*\_\*\*\* Software.zip** file and click **OK**.

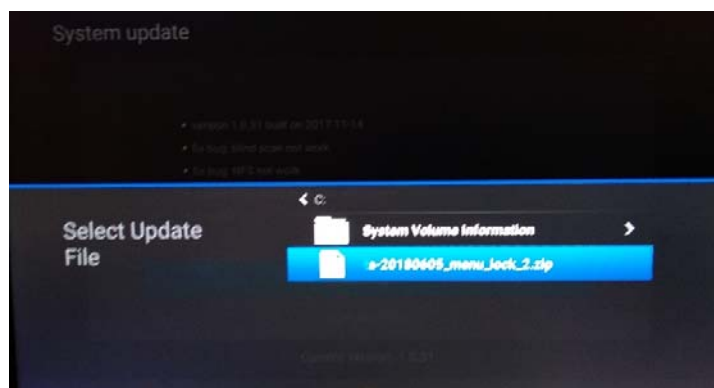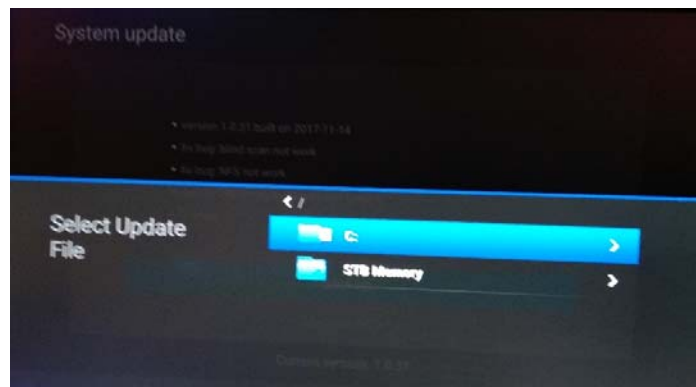

**Step 8.** Then press **confirm**

