

Vermantia Firmware Upgrade Installation Procedure (Over Internet) A4K STB

Version 1.0

Operations Department

© Vermantia, 2018 All rights reserved.

All copyright, intellectual and industrial rights in this document and in the technical knowledge it contains are owned by Vermantia and/or their respective owners.

This document is made available to the end users only for their internal use.

No part of this document nor any data herein may be published, disclosed, copied, reproduced, redistributed by any form or means, electronically or mechanically, or used for any other purpose whatsoever without the prior written approval of Vermantia.

All trademarks and copyrights mentioned herein are the property of Vermantia and/or their respective owners.



Any rights not expressly granted herein are reserved.

Revision History					
Version	Status	Effective Date	Author(s)	Description of Change	Approved by
1.035	Final		Toubanos Dimitris	Initial Version	Fotopoulos Georgios

Open A4K first time installation.

(Ignore that if doesn't appear)

Press >> to all 5 steps as the images below and next follow that instructions to the next page.

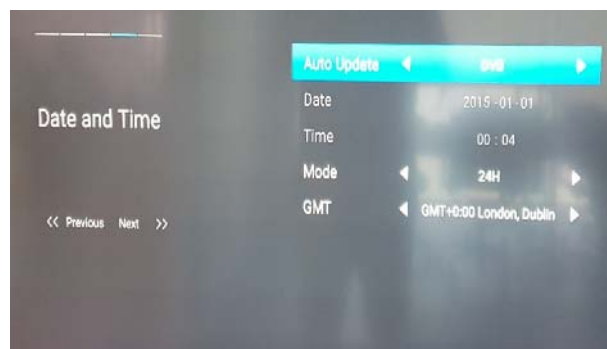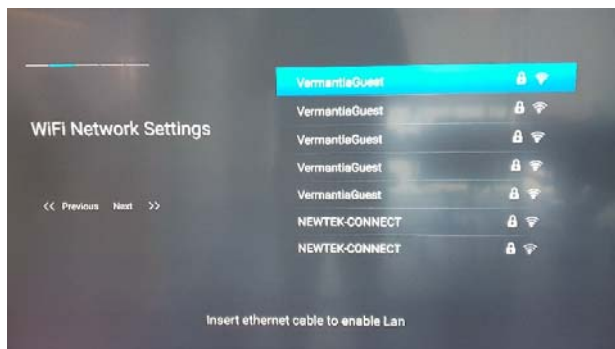

Instructions

Notice: Connect HDMI, power supply and RF cables.

Step 1. You will copy the desired software we have provide you (.ZIP) into the USB (NTFS FORMAT).
Connect the USB into the Set-top Box (STB).


Step 2. Power on STB and press **home** button (image 1).



Step 3. Navigate to **Settings**




Step 4. Connect the device to the Internet.

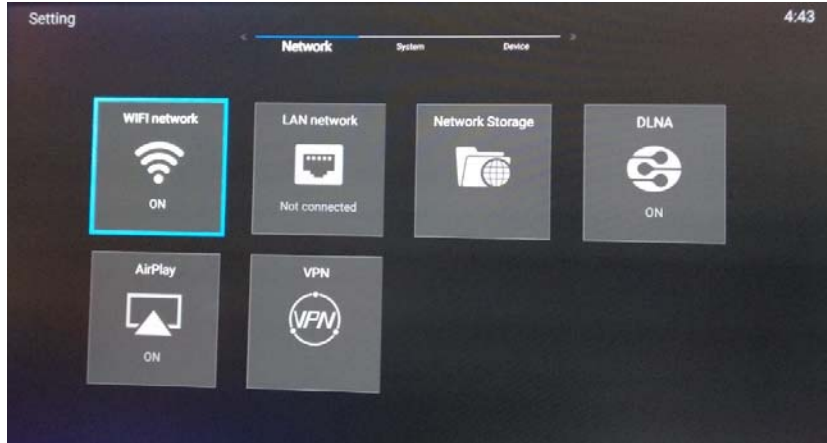


4.1. If you are using wired internet connection

- Navigate to LAN network and press 'OK'
- If The Ethernet is on 'OFF' State activate it by pressing 'OK' and choose yes on any prompt message

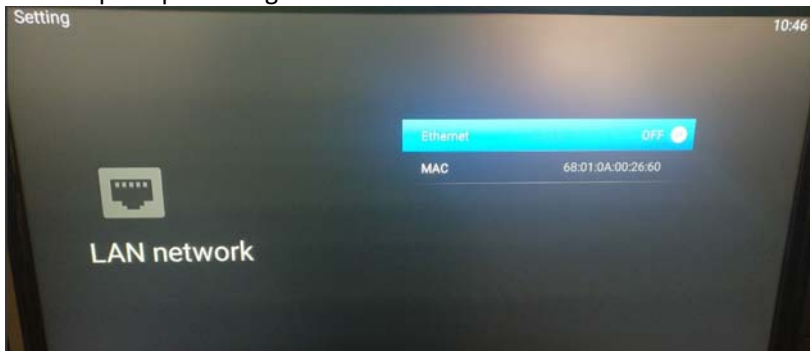


4.2. If you are using wireless internet connection

- Navigate to WIFI network and press 'OK'
- If the Wifi Network is on 'OFF' State activate it by pressing 'OK' and choose yes on any prompt message. Choose your desirable connection and press 'OK'. Put Password if needed and yes to any other prompt message.

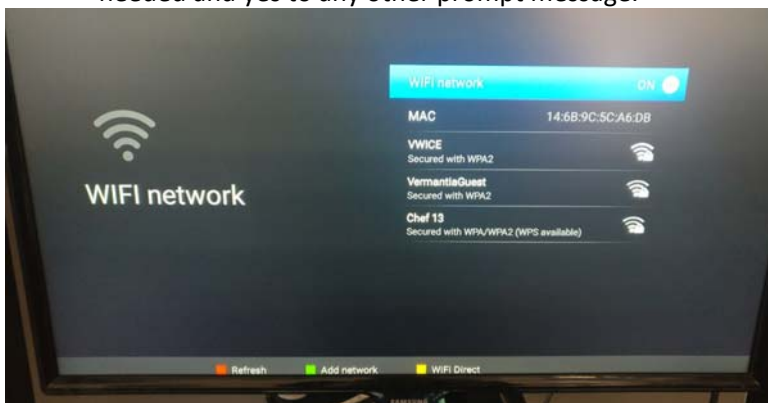


Step 5. Upgrade the Box

- Press the **arrows (>>)** on the controller to change tab and go to **System**
- Navigate to **Upgrade**

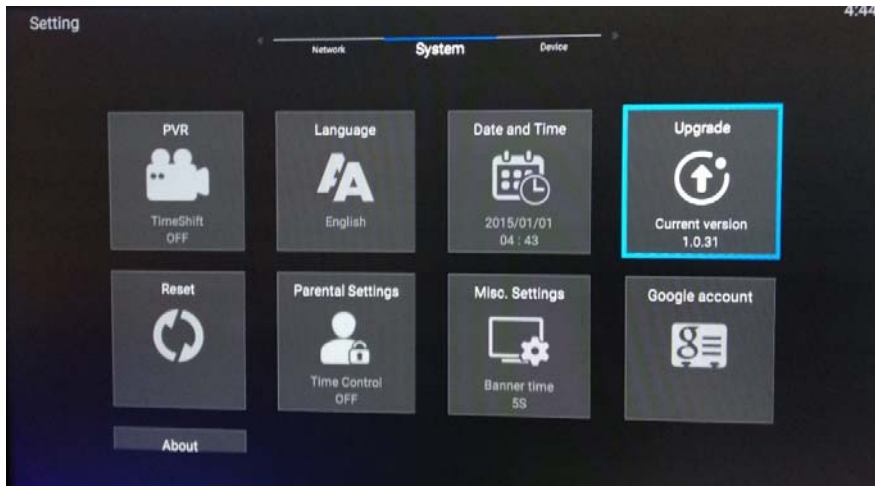

- Press 'Update now' and then 'OK' when the below prompt pops up

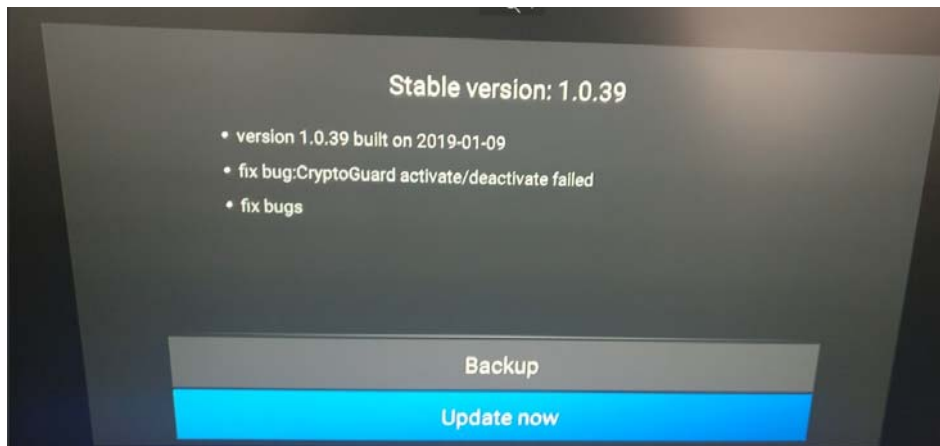

Step 6. The Box will restart after a while.

Step 7. Remember to roll back network changes (**Step 4**) and disconnect the box from the internet.